

About the Influence of Evaporation at Filtration in a Rectangular Interchange with a Particularly Unpermeable Vertical Wall



EN Bereslavskii* and LM Dudina

Department of Applied Mathematics and Informatics, University of Civil Aviation, Russia

Received: 📅 June 15, 2018; Published: 📅 June 28, 2018

*Corresponding author: EN Bereslavskii, Department of Applied Mathematics and Informatics, University of Civil Aviation, Russia

Abstract

We consider a plane steady-state filtration in a rectangular bridge with a partially impermeable vertical wall in the presence of evaporation from a free surface of groundwater. To study the effect of evaporation, a mixed multi parametric boundary-value problem of the theory of analytic functions is formulated and using the method of P. Y. Polubarinova-Kochina. Based on the proposed model, an algorithm is developed to calculate the dependence of efficiency and productivity of hydrodynamic analysis.

Keywords: Filtration; Evaporation; Jumper; Ground water; Free surface; Polubarinova-Kochina method; Complex velocity; Conformal mappings; Differential equations of the Fuchs class

Introduction

As it is known [1-6], the exact solution of tasks on inflow of liquid to an imperfect well with the flooded filter (i.e. an axisymmetric task) or the tubular well representing an impenetrable pipe with the filter in its some part is connected with great mathematical difficulties and so far isn't found. Therefore in due time as the first approach to the solution of similar tasks some corresponding flat tasks analogs about a filtration to imperfect rectilinear gallery in free-flow layer [4,7] and in a rectangular crossing point with partially impenetrable vertical wall were considered [8]. It should be noted that areas of complex speed of the specified cases allow applying by means of inversion at the decision Christoffel-Schwartz's formula.

In work [9] it is shown that the current picture near the impenetrable screen significantly depends not only on imperfection of gallery, but also on evaporation existence that is strongly reflected in an expense of gallery and ordinate of a point of an exit of a curve depression to an impenetrable wall.

In the real work the exact analytical solution of a task on a current of ground waters through a rectangular crossing point with partially impenetrable vertical wall in the presence of evaporation from a free surface of ground waters is given. In this case in the field of complex speed, unlike [1,4,6-8] there are not rectilinear, but circular polygons that doesn't give the chance to use classical integral of Christoffel-Schwartz. For the solution of a task P.Y. Polubarinova-Kochina's method is used [1-6]. By means of developed for areas of a special look [10-12] which are characteristic for problems of an underground hydromechanics, ways of conformal display of circular polygons [13-19] decides mixed multiple parameter tasks of the theory of analytical functions. The accounting of characteristics of the considered current allows to receive the decision through elementary functions that does its use by the simply and convenient. The provided detailed hydrodynamic analysis gives the flavor about possible dependence of filtration characteristics of the movement on all physical parameters. The

received results, at least, qualitatively can be postponed for a case of tubular wells.

Formulation of the Problem

In Figure 1 the rectangular crossing point with slopes of AA_1 and DB on the impenetrable horizontal basis of length of L is presented. Water height in the top tail of H , lower tail with water level of H_2 , having partially impenetrable vertical wall CD (screen), adjoins a layer sole. If the working part of the crossing point CB (filter) of width of H_1 is flooded, $H_2 > H_1$, an interval of seepage, usual for dams, is absent [1]. The upper bound of area of the movement is the free surface of AD , coming to the disproportionate CD , screen to which there is a uniform evaporation of intensity ϵ ($0 < \epsilon < 1$). Soil is considered uniform and isotropic, the current of liquid submits to Darcy law with known coefficient of a filtration $\kappa = \text{const}$.

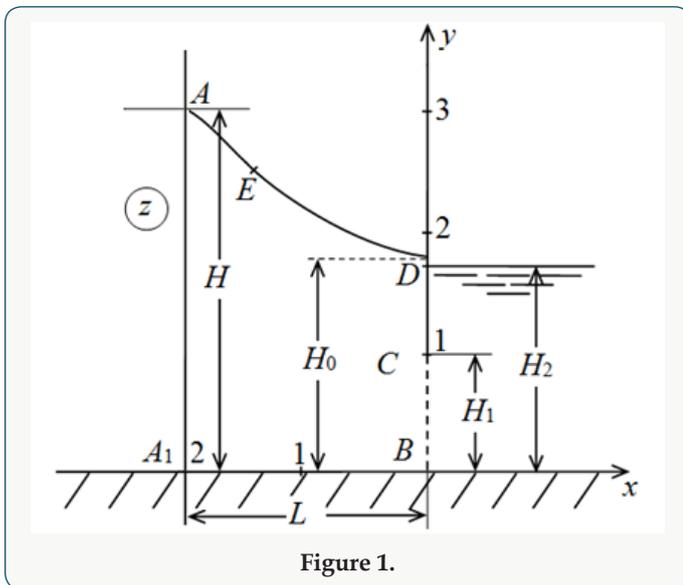


Figure 1.

We will enter the complex potential of the movement $\omega = \varphi + i\psi$ (φ —speed potential, ψ —function of current) and complex coordinates $z = x + iy$, carried respectively κH and H , where H — a pressure in A point. At choice of system of coordinates specified Figure 1 and at combination of the plane of comparison of pressures with the $y=0$ plane on border of area of a filtration the following regional conditions are satisfied:

$$\begin{aligned} AD: \varphi = -y, \psi = -\epsilon x + Q; \quad DC: x = 0, \psi = Q; \\ CB: x = 0, \varphi = -H_2; \quad BA_1: y = 0, \psi = 0; \quad A_1A: \varphi = -H, x = -L. \end{aligned} \quad (1)$$

The task consists in definition of provision of a free surface of AD and finding of ordinate of H_0 — points of an exit of a curve depression to the impenetrable screen, and also a filtration expense of Q .

Creation of the Decision

For the solution of a task we use P Y Polubarinova-Kochina's method which is based on application of the analytical theory

of the linear differential equations of a class of Fuchs [1-6,20]. We will enter: auxiliary area t -semi-strip $\text{Ret} > 0, 0 < \text{Im}t < 0.5\pi$ a parametrical variable t at compliance of points $t_A = \infty, t_{A1} = \text{arcth}\sqrt{a_1} + 0.5\pi, t_B = \text{arcth}\sqrt{b} + 0.5\pi i$ ($1 < a_1 < b < \infty$), a_1, b — unknown affixes of points A_1 and B in the plane $t, t_C = 0.5\pi i$ and $t_D = 0$; function $z(t)$, conformally displaying a plane t semi-strip on area z , and also derivative $d\omega/dt$ и dz/dt . We will address to area of complex speed of w , corresponding to boundary conditions (1) which is represented a circular quadrangle of $ACDE$ with a section with top in E point (the corresponding inflection point of a curve depression) and a corner $\Pi \nu = 2\text{arctg}\sqrt{\epsilon}$ at A , top belongs to a class of polygons in polar grids and was investigated [12-19] earlier. It is important to emphasize that similar areas, despite the private look, however are very typical and characteristic for many problems of an underground hydromechanics: at a filtration from channels, sprinklers and reservoirs, at currents of fresh waters over based salty, in problems of a flow of the tongue of Zhukovsky in the presence of salty retaining waters (see, for example, [9,21]).

The function making conformal display of a semi-strip to area of complex speed of w , has a former appearance [9]

$$w = -\sqrt{\epsilon}i \frac{\sqrt{\epsilon}(\text{chtch} \nu t + \text{Csh}t\text{sh} \nu t) + i(\text{chtsh} \nu t + \text{Csh}t\text{ch} \nu t)}{\text{chtch} \nu t + \text{Csh}t\text{sh} \nu t - i\sqrt{\epsilon}(\text{chtsh} \nu t + \text{Csh}t\text{ch} \nu t)}, \quad (2)$$

Where C ($C \neq 1$) — some suitable material constant.

Defining characteristic indicators of the $d\omega/dt$ and dz/dt functions about regular special points [1-6, 20], considering that $w = d\omega/dz$ and in view of a ratio (2), we will come to dependences

$$\begin{aligned} \frac{d\dot{u}}{dt} &= iM \frac{\sqrt{\dot{a}}(\text{chtch} \nu t + \text{Csh}t\text{sh} \nu t) + i(\text{chtsh} \nu t + \text{Csh}t\text{ch} \nu t)}{\Delta(t)}, \\ \frac{dz}{dt} &= -\frac{M}{\sqrt{\dot{a}}} \frac{\text{chtch} \nu t + \text{Csh}t\text{sh} \nu t - i\sqrt{\epsilon}(\text{chtsh} \nu t + \text{Csh}t\text{ch} \nu t)}{\Delta(t)}, \\ \Delta(t) &= \sqrt{[(a_1 - 1)\text{sh}^2 t + a_1][(b - 1)\text{sh}^2 t + b]}, \end{aligned} \quad (3)$$

Where $M > 0$ — a large-scale constant of modeling.

It is possible to check that functions (3) meet the boundary conditions (1) reformulated in terms of the $d\omega/dt$ и dz/dt , functions and, thus, are the parametrical solution of an initial regional task. Record of representations (3) for different sites of border of a semi-strip with the subsequent integration on all contours of auxiliary area of the parametrical t leads to short circuit of area of a current and, thereby, serves as control of calculations.

As a result we receive expressions for the set sizes: width of the L crossing point, water level in the top H and the lower H_2 the tail's and lengths of H_1 of the filter

$$\begin{aligned} \int_0^\infty X_{DA}(t) dt = L, \quad \int_{\text{arcth}\sqrt{a_1}}^\infty Y_{AA_1}(t) dt = H, \quad \int_0^{0.5\pi} [\Phi_{DC}(t) + Y_{DC}(t)] dt + H_1 = H_2, \\ \int_0^{\text{arcth}\sqrt{b}} Y_{CB}(t) dt = H_1, \end{aligned} \quad (4)$$

and also required coordinates of points of a free surface AD

$$x(t) = -\int_0^t X_{DA}(t)dt, y(t) = H_0 - \int_0^t Y_{DA}(t)dt \tag{5}$$

and expressions for a filtrational expense of Q and ordinate of a point of an exit of a free surface to the screen

$$Q = \int_0^{\text{arctg}\sqrt{b}} \Psi_{CB}(t)dt, H_0 = H - \int_0^{\infty} \Phi_{DA}(t)dt. \tag{6}$$

Control of the account are other expressions for sizes Q, H_0 and L

$$Q = -\varepsilon L + \int_{\text{arctg}\sqrt{a_1}}^{\infty} \Psi_{AA_1}(t)dt, \tag{7}$$

$$H_0 = H_2 - \int_0^{0.5\pi} \Phi_{DC}(t)dt, H_0 = H_1 + \int_0^{0.5\pi} Y_{DC}(t)dt, \tag{8}$$

$$L = \int_{\text{arctg}\sqrt{b}}^{\text{arctg}\sqrt{a_1}} X_{BA_1}(t)dt, \tag{9}$$

and also expression

$$\int_0^{\infty} \Phi_{DA}(t)dt - \int_0^{0.5\pi} \Phi_{DC}(t)dt - \int_{\text{arctg}\sqrt{b}}^{\text{arctg}\sqrt{a_1}} \Phi_{BA_1}(t)dt, \tag{10}$$

directly following from boundary conditions (1).

In formulas (4)-(10) sub integral functions-expressions of the right parts of equalities (3) on the corresponding sites of a contour of auxiliary area t . Limit case. At merge of points of A and A_1 , in the

plane t , at $a_1 \rightarrow 1$ ($\text{arctg } a_1 = \infty$) the crossing point degenerates in free-flow layer semi-infinite at the left and the task about a current of ground waters to imperfect gallery investigated earlier [9] turns out.

Calculation of the Scheme of A Current and Analysis of Numerical Results

Representations (3)-(10) contain four unknown constants of M, C, a_1 and b . The parameters a_1, b ($1 < a_1 < b < \infty$), C ($C \neq 1$) are defined from the equations (4) for the set sizes H_1, H_2 ($H_1 \leq H_2 < H$) and L , constant modeling of M thus is from the second equation (4), fixing water level H in the top tail of a crossing point. After definition of unknown constants consistently there is a filtration expense of Q ordinate of H_0 of a point of an exit of a curve depression to an impenetrable site DC on formulas (6) and coordinates of points of a free surface of DA on formulas (5). In Figure 1 the current picture calculated at $\varepsilon=0.5, H=3, L=2, H_1=1.0, H_2=1.4$ (basic option [9]) is represented. Results of calculations of influence of the defining physical parameters ε, H, H_1, H_2 and L at sizes Q and H_0 are given in Tables 1 & 2. In Figure 2 dependences of an expense of Q (curves 1) and ordinates H_0 of an exit of a curve depression to the screen (curves 2) from parameters ε, H, H_1, H_2 and L . Рис.2 Dependences of the sizes Q and H_0 from ε (a) at $H=3, L=2, H_1=1, H_2=1.4$, from H (б) at $\varepsilon=0.5, L=2, H_1=1, H_2=1.4$; or L (в) at $\varepsilon=0.5, H=3, H_1=1, H_2=1.4$; from H_1 (г) at $\varepsilon=0.5, H=3, L=2, H_2=1.4$; from H_2 (д) при $\varepsilon=0.5, H=3, L=2, H_1=1$.

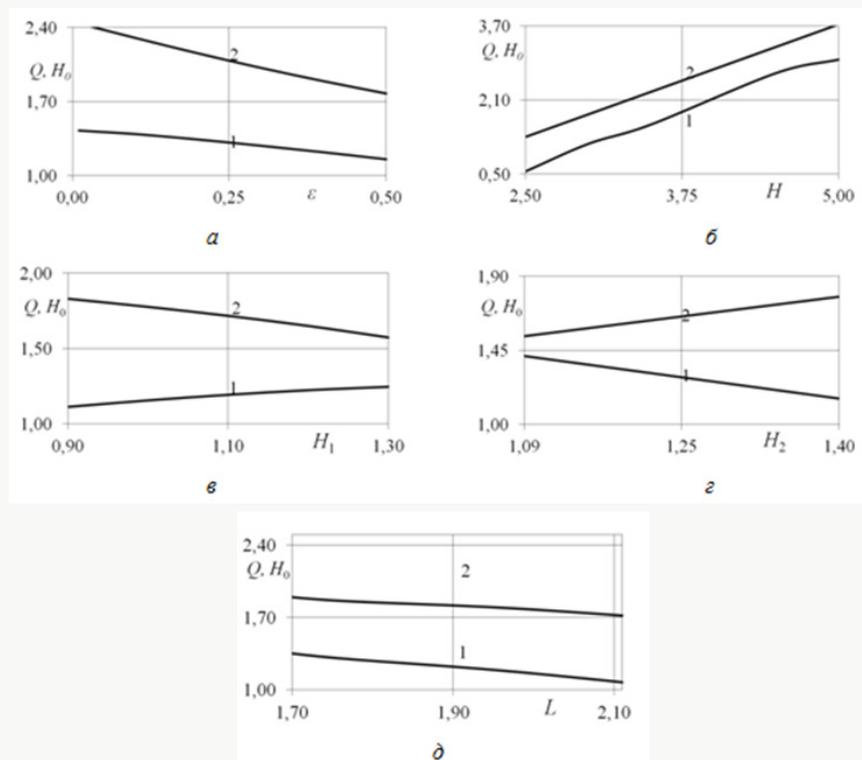


Figure 1: Dependences of the sizes Q and H_0 from ε (a) at $H=3, L=2, H_1=1, H_2=1.4$, from H (б) at $\varepsilon=0.5, L=2, H_1=1, H_2=1.4$; or L (в) at $\varepsilon=0.5, H=3, H_1=1, H_2=1.4$; from H_1 (г) at $\varepsilon=0.5, H=3, L=2, H_2=1.4$; from H_2 (д) при $\varepsilon=0.5, H=3, L=2, H_1=1$.

The analysis of these tables and schedules allows drawing the following conclusions. First of all opposite qualitative nature of change of the sizes Q and H_0 at a variation of parameters attracts attention ϵ , H and L (Table 1): also, as well as earlier [9] reduction ϵ and increase H is led to increase of an expense and ordinates of an exit of a curve depression to the screen. Thus, in relation to a filtration in a crossing point reduction of intensity and evaporation plays the same role, as well as increase in a pressure. Thus the greatest influence on the sizes Q and H_0 renders a pressure: at increase of parameter H by only 1.2 times the expense and ordinate increase more, than 52 and 24% respectively. Essential interest is

represented by dependences of an expense of a crossing point and ordinate of a point of an exit of a free surface to the screen from water level of H_2 in the lower tail, and also from extent of deepening of the screen, i.e. from the size H_1 at fixed ϵ , H and L (Table 2). Here as well as concerning parameters ϵ and H observed opposite qualitative nature of change of the sizes Q and H_0 at a variation of H_1 and H_2 . It is visible that increase in water level of H_2 in the lower tail and reduction of deepening of the H_1 screen are followed by reduction of an expense and raising of a free surface that, in turn, it is expressed in increase in H_0 ; both of these factors characterize strengthening a sub time.

Table 1: Results of calculations of the sizes Q and H_0 at a variation ϵ , H and L .

ϵ	Q	H_0	H	Q	H_0	L	Q	H_0
0.1	1.3937	2.3003	2.5	0,5624	14,074	1.5	1.6261	2.1424
0.2	1.3423	2.1544	3	11,554	1,775	1,7	1,897	13,492
0.3	1.2839	2.0179	3.5	15,715	20,883	2	1.1554	1.7755
0.4	1.2218	1.892	4.5	26,811	33,097	2.5	0.7585	1.5045
0.5	1.1554	1.7755	5	29,726	37,528	2.9	0.4863	1.3727

Table 2: Results of calculations of the sizes Q and H_0 at variation H_1 and H_2 .

H_1	Q	H_0	H_2	Q	H_0
0.9	1.112	1.8292	1.09	1.3965	1.5533
1	1.1554	1.7755	1.19	1.3627	1.5775
1.1	1.1928	1.7161	1.29	1.2425	1.7051
1.2	1.2235	1.6494	1.39	1.1598	1.7695
1.3	1.246	1.5728	1.4	1.1634	1.7694

Follows from Table 1 and Figure 2 that reduction of the H_1 и H_2 parameters respectively at 1.45 and 1.29 times attracts change of size Q for 16.8 % (at fixation of H_1) and 12 % (at fixation of H_2). Noted regularities lead to the conclusion that the expense of a crossing point depends on the size of lowering of the level in a little bigger degree, than on filter length (or from imperfection of a well or a well). From Figure 2 it is visible that for basic option almost all dependences of the sizes Q and H_0 on parameters ϵ , H , H_1 , H_2 and L are close to the linear. Comparison of the results received for basic option $Q=1.155$ and $H_0=1.776$ with results $Q=1.141$ and $H_0=1.768$ for basic option [9] where the current area was limited equipotential at the left shows that the relative error is very small and makes only 0.5 and 1.3% respectively.

Comparison of value of the expense $Q=1.16$, received for basic option to $Q=1.26$, value which follows at application of the generalized I.A. Charny’s formula [1, with. 267] for a usual rectangular crossing point (without screen) in the presence of evaporation leads 8.3% to an error.

$$Q = -\frac{\epsilon L}{2} + \frac{H^2 - H_2^2}{2L},$$

For comparison with results [7] we will consider option $\epsilon=0.1$, $H=1$, $L=4$, $H_1=0.05$, $H_2=0.238$ for which $Q=42$, $H_0=0.75$ is received,

and, therefore, relative errors make respectively 71 and 61%. Thus, as well as in [9], here too evaporation significantly influences a current picture.

Conclusion

The technique of creation of the exact analytical solution of a task on the movement in liquid in a rectangular crossing point with the screen in the presence of evaporation from a free surface of ground waters is developed. It is shown that the current picture near the impenetrable screen significantly depends not only on the filter size, but also on evaporation existence that is strongly reflected in an expense and ordinate of a point of an exit of a curve depression to the screen. The received results give an idea (at least qualitatively) of possible dependence of characteristics of a current by consideration of a task about a filtration already to an imperfect well or a tubular well.

References

1. Polubarinova Kochina PYA (1952) The Theory of Motion of Groundwater. The science, Gostekhizdat, Moscow, Russia.
2. Aravin VI, Numerov SN (1953) The Theory of Motion of Liquids and Gases in an Undeformable Porous Medium. Gostekhizdat, Moscow, Russia.
3. Polubarinova Kochina PYA (1967) Development of Investigations into the Theory of Filtration in the USSR The science, Moscow, Russia.

4. Polubarinova Kochina PYA, Pryazhinskaya VG, Emikh VN (1969) Mathematical Methods in the Problems of Irrigation. The science. Moscow, Russia.
5. Mikhailov GK, Nikolaevskii VN (1970) Motion of liquid and gases in porous media, in: Mechanics in the USSR in 50 Years. The science. Moscow, Russia, 2: 585-648.
6. Kochina PY (1991) Hydrodynamics and the theory of filtration. Selected Works Nauka Publ Moscow, Russia.
7. Priazhinskaia VG (1964) Movement of groundwater in a rectangular web with an impenetrable vertical wall. AN SSSR. *Mechanika i Mashinostroenie* 4: 41-49.
8. Polubarinova Kochina PY, Postnov VA, Emikh VN (1967) Steady filtration to the unadulterated gallery in the free-flowing formation. *Izv AN SSSR Mekhanika zhidkosti i gaza* 4: 97-100.
9. Bereslavskii EN, Dudina LM (2018) About flow of ground water to imperfect gallery in the presence of evaporation with a free surface. *Matem Mod* 30(2): 99-109.
10. Kochina PY, Bereslavskii ÉN, Kochina NN (1996) Analytical Theory of the Fuchs Class Linear Differential Equations and Some Problems of Underground Hydromechanics, Pt. 1, Preprint No. 567 of the Institute for the Problems of Mechanics, Russian Academy of Sciences. Moscow, Russia.
11. Bereslavskii EN, Kochina PYa (1997) On Fuchs class differential equations encountered in some problems of the mechanics of liquids and gases, Proceedings of the Academy of Sciences, mechanics of gas liquid. 9: 175.
12. Bereslavskii ÉN (1989) On closed form integration of one class of Fuchsian equations and its application. *Differ Equ* 25: 1048-1049.
13. Bereslavskii ÉN (1997) On Fuchs-class differential equations associated with conformal mapping of circular polygons in polar grids. *Differ Equ* 33: 296-301.
14. Bereslavskii ÉN (2010) On closed form integration of some Fuchs-class differential equations associated with conformal mapping of circular pentagons with a cut. *Differ Equ* 46: 459-466.
15. Bereslavskii EN (2010) On accounting for infiltration or evaporation from a free surface by the method of circular pentagons. *Journal of Applied Mathematics and Mechanics* 74: 239-251.
16. Golubev VV (1950) Lectures on the Analytical Theory of Differential Equations. Gostekhizdat Moscow, Russia.
17. Bereslavskii EN, Zakharenkova NV (2010) Influence of the ground capillary and of evaporation from the free groundwater surface on filtration from canals. *Journal of Engineering Thermophysics* 83: 496-504.
18. Bereslavskii EN (2010) Mathematical modeling of flows from canals. *Journal of Engineering Thermophysics* 84: 745-752.
19. Bereslavskii EN (2012) On calculation of filtration flows from sprayers of irrigation systems. *Journal of Engineering Thermophysics* 85: 516-522.
20. Bereslavskii EN (2012) Calculation of filtration from canals and irrigators. *Journal of Engineering Thermophysics* 85:752-763.
21. Bereslavskii EN (2015) On the limiting cases related to flow past a Zhukovskii sheet pile. *Journal of Engineering Thermophysics* 88(3): 602-609.



This work is licensed under Creative Commons Attribution 4.0 License

To Submit Your Article Click Here: [Submit Article](#)

DOI: [10.32474/CIACR.2018.03.000163](https://doi.org/10.32474/CIACR.2018.03.000163)



Current Investigations in Agriculture and Current Research

Assets of Publishing with us

- Global archiving of articles
- Immediate, unrestricted online access
- Rigorous Peer Review Process
- Authors Retain Copyrights
- Unique DOI for all articles